

TECHICAL SPECIFICATION

SDS with Washer, St. Sheets to Wood by RAL Kamfix SDS with Washer, St. Sheets to Wood, Zn, Kamfix

Trade mark

kamfix



Product application

For fastening sheet metal coverings, sheathing, roof constructions up to 2.5 mm thick to WOODEN base. Self-drilling screw with a hex head and a flange under the head.


Complete with a sealing EPDM washer with an external diameter of 14 mm., sealing the drilled hole and preventing water from seeping into the base.

The special design of the screw / small diameter tip and sharp thread with a wide pitch / help the screw easily pass through the sheet metal, then fix it securely and stably in the wooden base.

Colored head screws follow the RAL color coding system. A numeric code defines the exact color.

Example: RAL 8017 – brown

Installation:

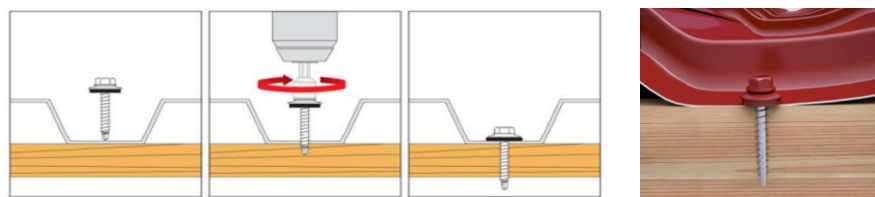

- Choose the right length of screw depending on the distance to the base.
- Recommended rpm - up to 2,500 rpm. Exceeding the recommended RPM may cause the tip to melt or break.
- Be sure to apply the appropriate force to tighten the screw. If the screw is under-tightened or over-tightened, the EPDM washer will not provide the necessary sealing of the hole.
- Always mount the screw at a 90° angle to the base.

