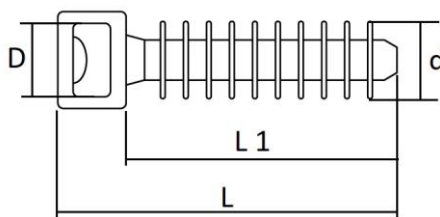


TECHNICAL SPECIFICATION**Masonry Cable Tie Mounts till 9 mm, Black 10x40****kamfix****Application:**

For securing cables, cable bundles, pipes, and other items to solid substrates / concrete, solid brick /. Fastening is achieved by threading a cable tie through the hole in the mount, tightening, and fixing the components in place.

Applicable for cable ties up to 9 mm in width.

Technical Specifications:

- Total length: $L = 40 \text{ mm}$ tolerance $\pm 2 \text{ mm}$
- Body length: $L_1 = 35 \text{ mm}$ tolerance $\pm 2 \text{ mm}$
- Shank / Collar diameter: $d = 10 \text{ mm}$ tolerance -0.6 mm
- Mounting hole diameter: $D = 9.5 \text{ mm}$ tolerance $+1 \text{ mm}$
- Material: Polyamide 6.6 (Nylon 6.6)
- Operating Temperature: -10°C to $+65^{\circ}\text{C}$
- Max Cable Tie Width: up to 9.0 mm

Installation Instructions:

1. Drill a hole with a diameter of **8 mm**. and a depth of 40 mm.
2. Insert the mount into the drilled hole and tap/hammer it in until the body is fully embedded.
3. Thread a cable tie through the mounting hole of the anchor and tighten it to fix the components to the mount.
4. The length of the cable tie is selected according to the diameter of the secured items.