

TECHNICAL SPECIFICATION

UNIVERSAL PLUG WITH CSK COLLAR XUP

Trade mark

kamfix



Product designation:


XUP d x L / K

- **XUP** – unique code of the product
- **d x L** – diameter and length of the plug
- **K** – trade mark KAMFIX

Application:

Universal plug with 4 release zones. Suitable for installation with any building materials. Locking springs lock the plug in the hole. The specially designed outer profile prevents the plug from rolling. It does not expand in the collar area, which is an advantage when installing in faience, terracotta or plasterboard. The four zones of expansion provide optimal fastening, by pressing against the base, in dense materials and by forming a knot, when installing in materials with internal cavities.

Technical information

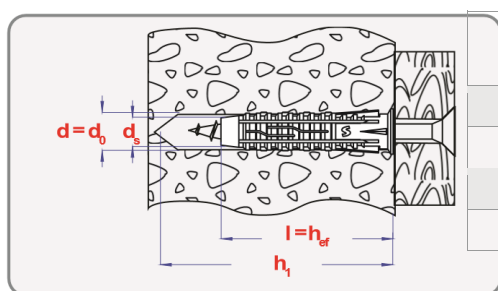


D [mm]	I [mm]	d ₀ [mm]	h ₁ [mm]	d _s [mm]	hef [mm]
5	25	5	35	3,0-4,0	25
6	30	6	40	4,0-5,0	30
8	40	8	50	4,5-6,0	40
10	50	10	70	6,0-8,0	50

Material:

Polyamide / Nylon

Assembly:



1. A hole is drilled in the base.
2. It is recommended that the drilled hole be cleaned of solid debris.
3. When drilling through soft materials, the non-impact drilling mode **MUST** be used. The use of impact drilling leads to the destruction of the structure of the material and the reliable fastening of the plug cannot be guaranteed.
4. Screw the screw through the fastening part until tight.

Advantages:

- Quick, easy installation.
- The geometry of the collar allows the plug not to sink to the bottom of the drilled hole.
- Feathers on the contour of the profile do not allow scrolling when turning the screw.
- Versatility, suitable for any building foundations.

Possibility of installation in foundations with internal cavities.

