

DECLARATION OF PERFORMANCE

1. Description and determination of product:

Ceiling Anchor, Zn

2. Application:

Ceiling anchor is designed for mounting suspended ceilings. When hammering the expansion wedge expands the diameter of the working part of the anchor in a pre-drilled hole - 6.00 mm

3. Name, registered trade name or registered trademark and contact address:

KAM-04 Ltd.

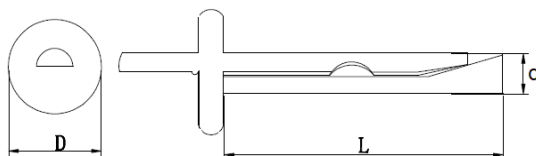
176, Brezovsko Shousse str., 4003 Plovdiv, Bulgaria

Trade mark**kamfix**

4. System or systems for assessment and verification of constancy of performance.

System 2+

5. Declared performance indicators:

**Ceiling Anchor, Zn**

Main indicators	Performance indicator				Technical specifications
1. Sizes					
d x L /mm/	d / mm /	D / mm /	L /%/	Recommended load capacity /kg/	
M6 x 35	5.7 – 6.3	14.1 – 14.7	+/- 2%	25	
M6 x 65	5.7 – 6.3	14.1 – 14.7	+/- 2%	30	
2. Frame material	Steel type ML 08				
2.1 Tensile strength of the frame	400 MPa				ISO 898-1:2013
3. Wedge material	Steel type C1045				
3.1 Tensile strength of the wedge	600 MPa				
4. Durability	Zinc plated - 3,9÷5,7 µm.				ISO 4042:1999
5. Installing material	Concrete C12/15 or higher class. Natural stone with dense structure.				

6. The performance of the product identified in p.1 corresponds to the declared performance in p.5

7. The current Declaration of Performance is issued entirely under the responsibility of the company, indicated in p.3 on the basis of a declaration of the manufacturer /supplier/.

Date: 08.04.2015

Place: Plovdiv

KAM-04 Ltd:
/ Product Manager /

