

TECHNICAL SPECIFICATION**PP Multi Plug with C-Hook PCH**

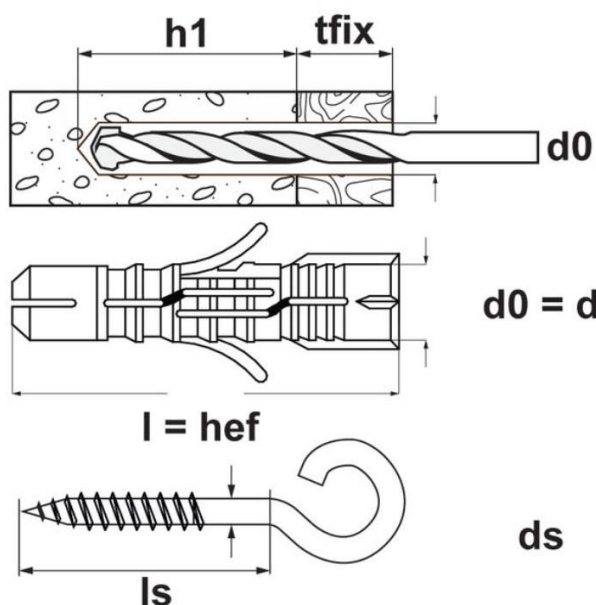
Trademark

kamfix**Product designation:****PCH d x L / ds x Ls / K**

- **PCH** – unique code of the product
- **d x L** – diameter and length of the plug
- **ds x Ls** – diameter and length of the hook
- **K** – trademark **kamfix**

Product application:

Universal plug complete with C-hook, suitable for mounting wall decorations, hangers, bathroom accessories to concrete or solid masonry.

Technical information:

- d** – Diameter
- l** – Length
- d₀** – Diameter of the drill bit
- h₁** – Dept of drilling
- t_{fix}** – Thickness of the attached element
- h_{ef}** – Effective anchorage depth
- d_s** – Diameter of the hook
- l_s** – Length of the hook

Size	d, mm	l, mm	d0, mm	h1,mm	tfix,mm	hef,mm	ds,mm	ls,mm
PCH 6x30 / 4x35 /K	6	30	6	40	10	30	4	35
PCH 8x40 / 5x42 /K	8	40	8	50	10	40	5	42
PCH 10x50 / 6x55 /K	10	50	10	60	10	50	6	55
PCH 12x60 / 8x65 /K	12	60	12	70	10	60	8	65

Material:

Plug - Polypropylene
Hook - Galvanized steel

Installation:

1. A hole is drilled in the base.
2. It is recommended that the drilled hole be cleaned of solid debris.
3. Screw the hook through the fastening part until tight.

Advantages:

- Quick, easy installation.
- The geometry of the collar allows the plug not to sink to the bottom of the drilled hole.
- Feathers on the contour of the profile do not allow scrolling when turning the hook.
- Possibility to screw the hook according to your needs.